
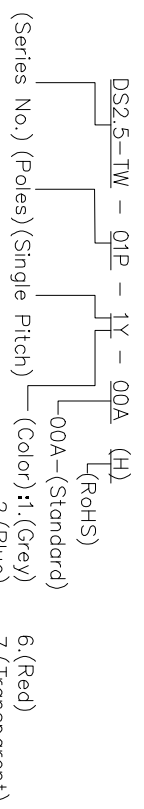
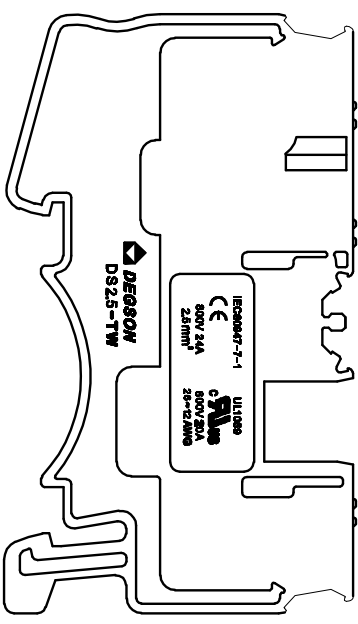


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

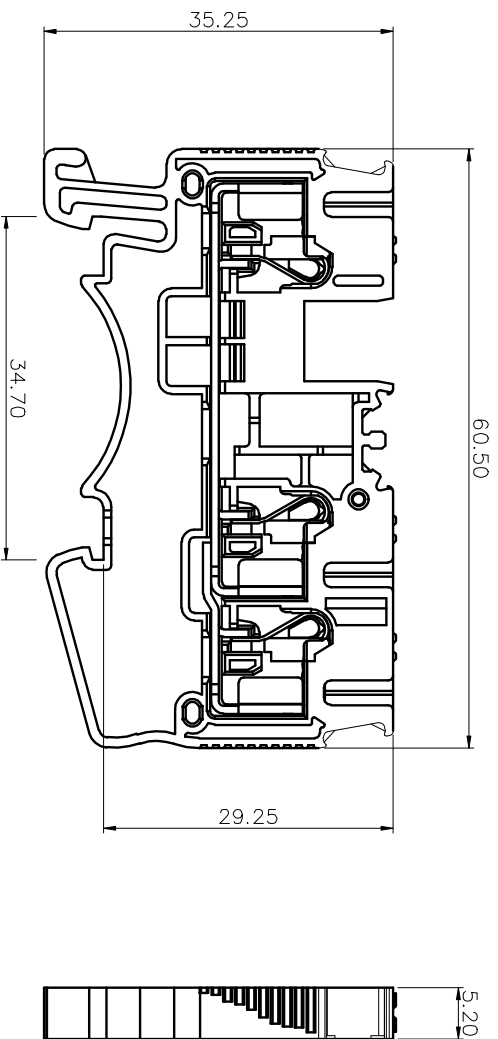

NOTES1:  
 UL Standard  
 1. Rated voltage/current : 600V / 20A  
 2. Withstanding voltage : AC2200V/1Min.  
 3. Wire range : 26~12AWG

NOTES2:  
 1. Dimension shall be interpreted per ASME Y14.5-2009  
 2. Pitch : 5.20mm, Poles : 01P  
 3. Stripping length : 10~12mm  
 4. Operating temperature: -40C~+105°C  
 5. Undimensioned tolerances:

IEC Standard

Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8.0KV
Rate voltage(V)	800V
Rate current(A)	24A

Pitch	Range	In	Nominal Dimension	Range	
mm	mm	In	mm	mm	mm
Over	Over	Over	Over	Over	Over
6	10	10	30	60	100
TO	TO	TO	TO	TO	TO
10	10	24	30	60	100
6	10	24	30	60	100
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70
					±1.00
					±1.30
					±2

2. Wire range : 0.2~2.5mm<sup>2</sup>(4mm<sup>2</sup> sol)

6. RoHS Compliance

DETACHED LISTS		PART NO.:	
APPD:	/	/	
CHKD:	/	/	
DRFT:	/	/	
THIRD ANGLE PROJECTION		THIRD ANGLE PROJECTION	
NAME:		NINGBO DEGSON ELECTRICAL CO., LTD	
TITLE:		CUSTOMER DRAWING	
DRAWING NO.:	/	REV	DO
SCALE	(INCH)	SHEET	1/1
DO NOT SCALE DRAWING	SCALE	1:1	1:1