

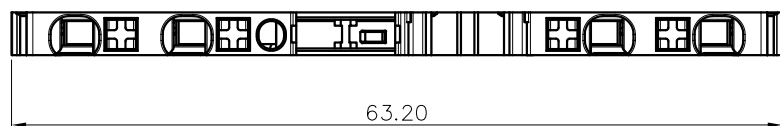
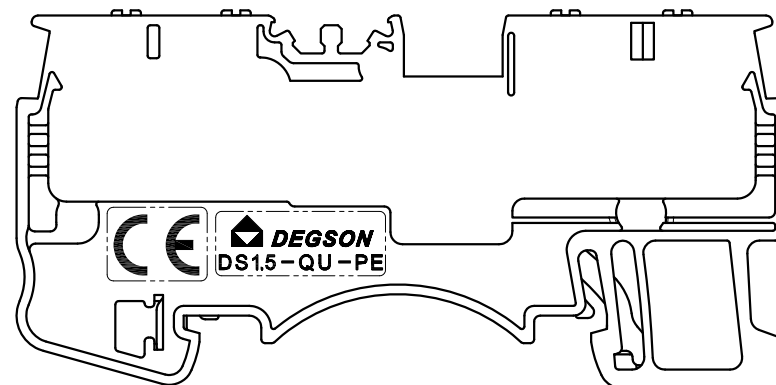


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

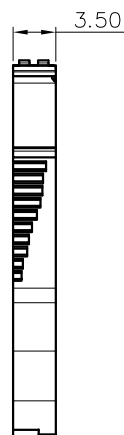

DS1.5-QU-PE - 01P - 1C - 00A (H)
(Series No.) (Poles) (Single Pitch) (Color): C. (Green-yellow)
(RoHS)
00A-(Standard)

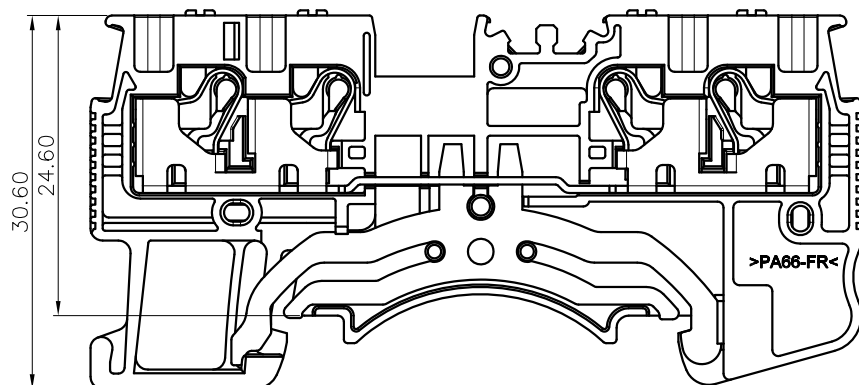

NOTES1:

UL Standard

1.Wire range : 26~16AWG & 14AWG(SOL)

IEC Standard

1.	Pollution degree	3
	Overvoltage category	III
	Rate impulse voltage(KV)	6.0KV
	Rate voltage(V)	/
	Rate current(A)	/

2.Wire range : 0.14~1.5mm²
conductor cross section flexible, with
ferrule with plastic sleeve max.0.5mm²
(Stripping length: 8mm)

NOTES2:

1.Dimension shall be interpreted per
ASME Y14.5-2009

2.Pitch : 3.5mm, Poles : 01P

3.Stripping length : 8~10mm

4.Operating temperature: -40°C~+105°C

5.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm						
To	Over	To	Over	To	Over	To	Over	
6	10	10	24	30	60	100	150	0.1/10
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

6.RoHS Compliance

DETACHED LISTS	PART NO.:	/				DEGSO [®] 宁波高松电子有限公司 NINGBO DEGSO ELECTRICAL CO., LTD			
	APPD:	/				NAME: DS1.5-QU-PE-01P-1C-00A(H)			
	CHKD:	/				TITLE: CUSTOMER DRAWING			
	DRFT:	/				REV DO			
		THIRD ANGLE PROJECTION		DRAWING NO.: /		SHEET 1/1		DO NOT SCALE DRAWING	
				MM (INCH)		SCALE 1:1			