

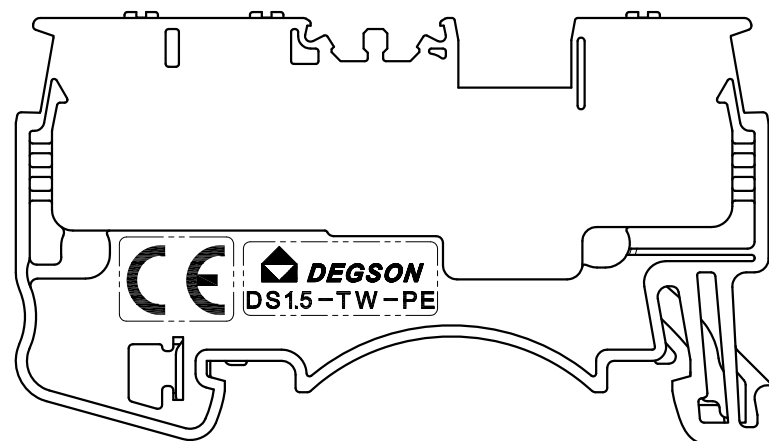


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

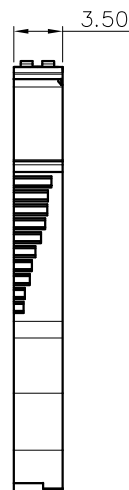

DS1.5-TW-PE - 01P - 1C - 00A (H)
(Series No.)(Poles)(Single Pitch) (Color):C.(Green-yellow)
(RoHS)
00A-(Standard)

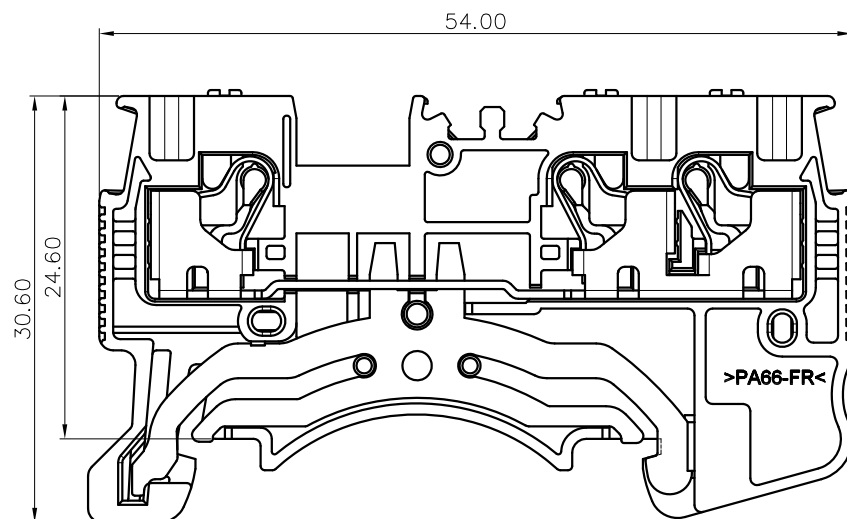

NOTES1:

UL Standard

1.Wire range : 26~16AWG&14AWG(SOL)

IEC Standard

1. Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	6.0KV
Rate voltage(V)	/
Rate current(A)	/

2.Wire range : 0.14~1.5mm²
conductor cross section flexible, with
ferrule with plastic sleeve max.0.5mm²
(Stripping length: 8mm)

NOTES2:

1.Dimension shall be interpreted per
ASME Y14.5-2009

2.Pitch : 3.5mm, Poles : 01P

3.Stripping length : 8~10mm

4.Operating temperature: -40°C~+105°C

5.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm							0.1/10
Over 6 TO 10	Over 10 TO 24	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150				
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'	≤

6.RoHS Compliance

DETACHED LISTS	PART NO.:	/				宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	/				NAME: DS1.5-TW-PE-01P-1C-00A(H)			
	CHKD:	/				TITLE: CUSTOMER DRAWING			
	DRFT:	/				DRAWING NO.: /		REV	DO
					THIRD ANGLE PROJECTION		MM (INCH)	DO NOT SCALE DRAWING	SCALE 1:1