
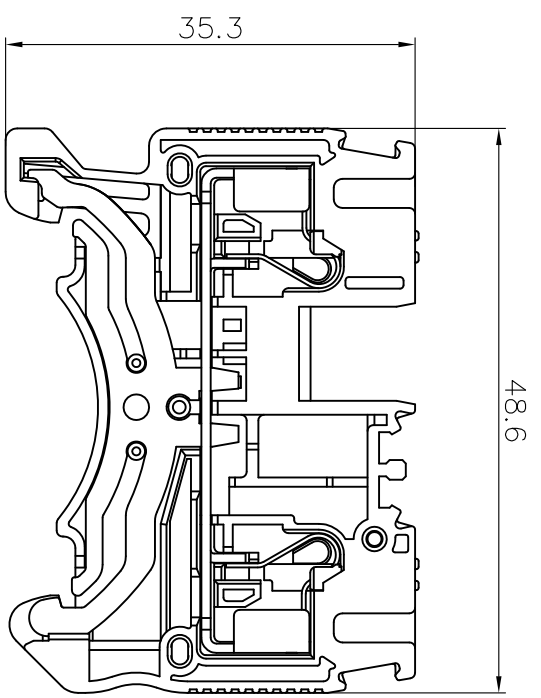
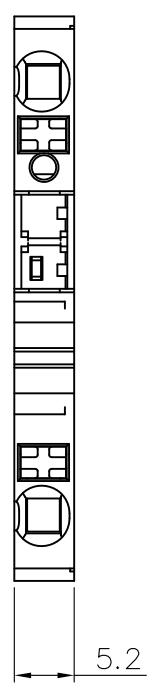


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

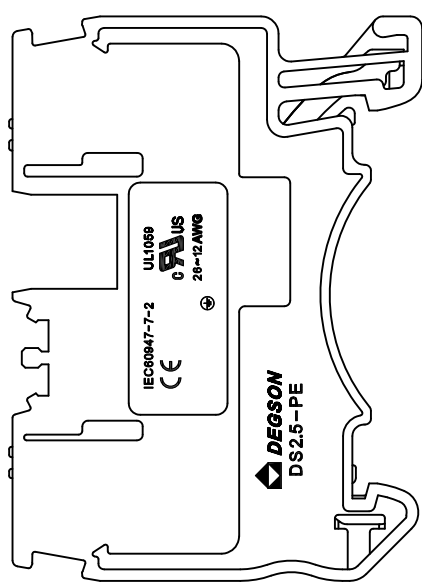

NOTES1:
 UL Standard
 1.Wire Range : 26~12AWG
 IEC Standard

1. Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(KV)	8.0KV
Rate Voltage(V)	/
Rate Current(A)	/


2. Wire Range : 0.2~2.5mm²; sol: 4mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 5.2mm, Poles : N=01P
- 3.Stripping length : 10-12mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned Tolerances:

Pitch Range	In		Nominal		Dimension		Range		mm						
	Over	TO	Over	TO	Over	TO	Over	TO							
6	10	TO	30	60	100	150	0.1/10	∇							
10	24	TO	60	100	150	∠									
±0.15		±0.20		±0.30		±0.50		±0.70		±1.00		±1.30		±2	

6.RoHS Compliance

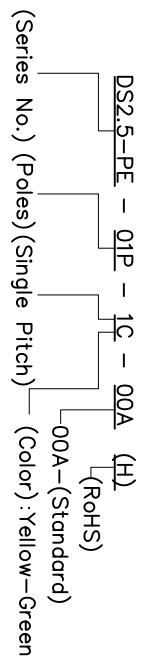

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD
APPD:	/	TITLE:	CUSTOMER DRAWING
CHKD:	/	DRAWING NO.:	/
DRFT:	/	REV	DO
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SCALE
		1X1 (INCH)	1:1