


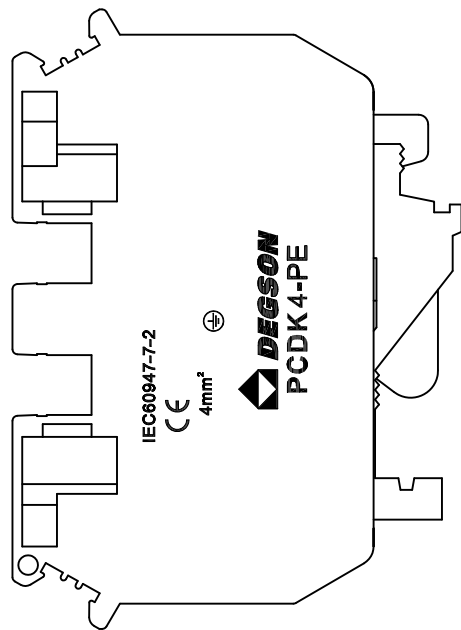

NOTES1:
UL Standard
1.Torque value : M3 , 4.43Lb.in
2.Wire range : 24~10AWG

IEC Standard

1. Pollution degree	3
Overvoltage category	III
Rate impulse voltage(kV)	8.0kV


2.Torque value : M3 , 0.5N·m
3.Wire range : 0.2~4.0mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 6.20mm, Poles : N=01P
- 3.Stripping length : 7~8mm
- 4.Operating temperature: -40℃~+105℃
- 5.Undimensioned tolerances:

Pitch range		Nominal dimension range						
mm	in	mm	mm	mm	mm	mm	mm	
Over	Over	6	10	30	60	100	150	0.1/10
TO	TO	10	TO	TO	TO	TO	TO	
6	10	24	30	60	100	150		≤
±0.15±0.20±0.30±0.50±0.70±1.00±1.30 ±2°								

6.RoHS Compliance

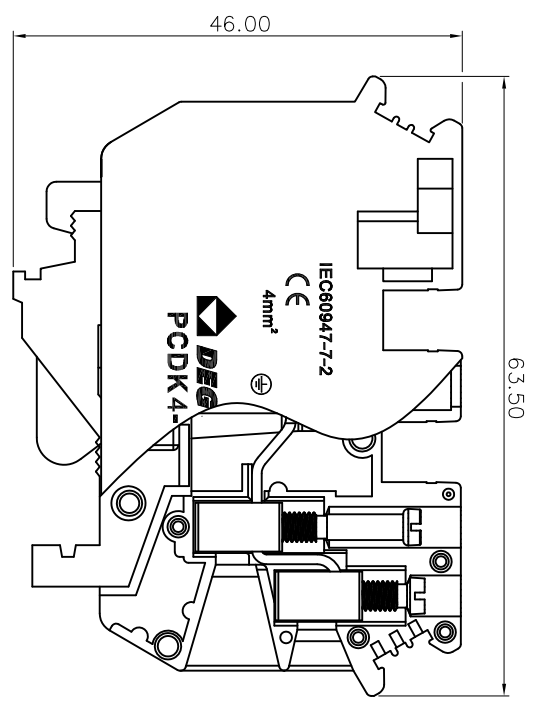

DETACHED LISTS	
PART NO.:	/
APPD:	/
CHKD:	/
DRFT:	/
THIRD ANGLE PROJECTION	
DRAWING NO.: /	
DO NOT SCALE DRAWING	
SCALE	1:1

宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: PCDK4-PE-01P-1Y-00A(H)