
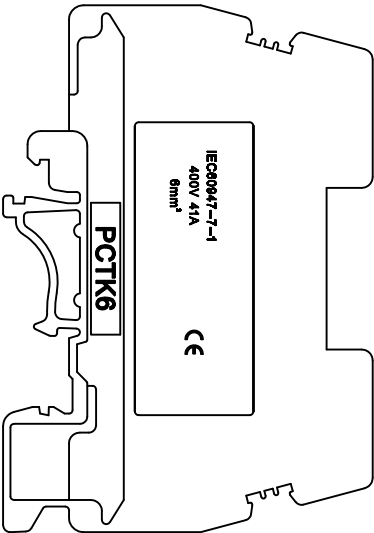



REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT
		DATE	

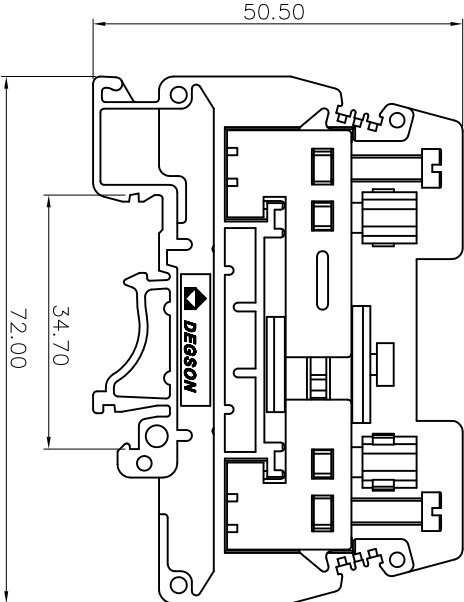

PCTK6 - 01P - 1Y - 00A (H)
(Series No.) (Poles) (Single Pitch) (Color) : 1. (Grey)
2. (Blue)
3. (Black)
4. (Green)
5. (Orange)
6. (Red)
7. (Transparent)
8. (Yellow)
9. (White)

NOTES1:

- 1. Rated voltage/current : 300V / 40A
- 2. Withstanding voltage : AC1600V/1Min.
- 3. Torque value : M4 , 10.53lb.in
- 4. Wire range : 26~8AWG

IEC Standard

Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	6KV
Rate voltage(V)	400V
Rate current(A)	41A

- 2. Torque value : M4 , 1.2N·m
- 3. Wire range : 0.5~6mm²

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 8.20mm, Poles : N=01P
- 3. Stripping length : 13~14mm
- 4. Operating temperature: -40℃~+105℃
- 5. Undimensioned tolerances:

Pitch range in mm		Nominal dimension in mm		Nominal dimension range		
Over	6	Over	30	Over	60	Over
TO	10	TO	10	TO	100	TO
6	10	24	30	60	100	150
±0.15±0.20±0.30		±0.30±0.50±0.70		±1.00±1.30		±2°

6. RoHS Compliance

ITEM	NAME OF PART	MATERIAL	NOTES
------	--------------	----------	-------

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	NAME:	PCTK6-01P-1Y-00A(H)
CHKD:	/	TITLE:	CUSTOMER DRAWING
DRFT:	/	DRAWING NO.:	/
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SCALE
		1:1	1:1