
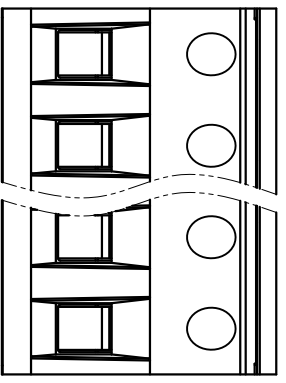
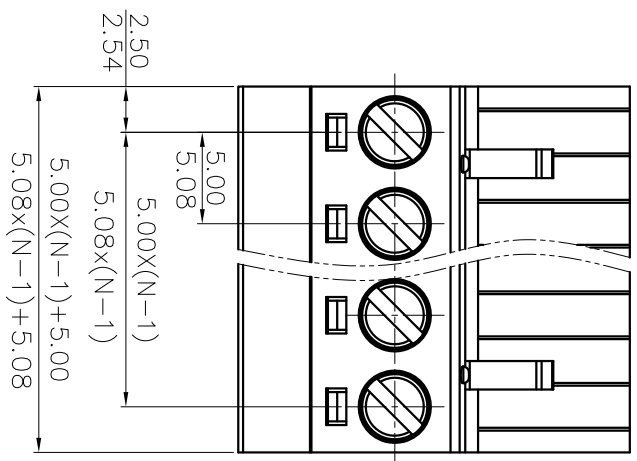
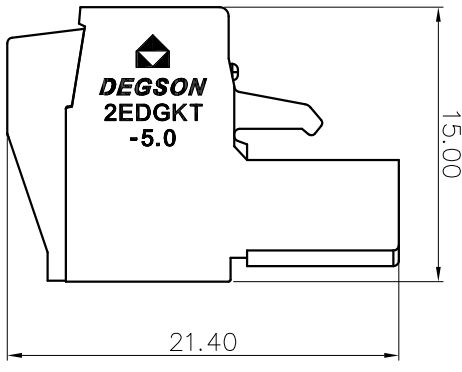
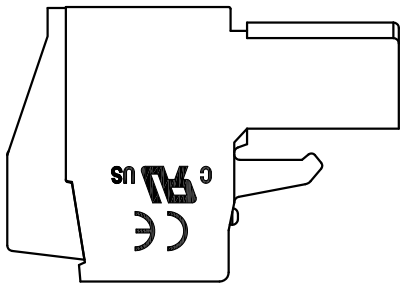


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

02P: Clasp on the left from this view

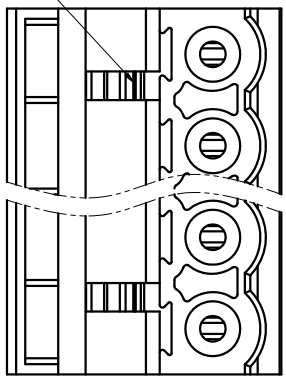

- NOTES1:  
UL Standard  
1. Rated voltage/current : 500V / 18A  
2. Withstanding voltage : AC1600V/1min.  
3. Torque value : M3, 5.21lb.in  
4. Wire range : 30~12AWG
- IEC Standard


1. Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(kV)	4.0kV
Rate Voltage(V)	320V
Rate Current(A)	20A

2. Torque value : M3 , 0.59N·m  
3. Wire range : 1.0~2.5mm<sup>2</sup>

- NOTES2:  
1. Dimension shall be interpreted per ASME Y14.5-2009  
2. Pitch : 5.00/5.08mm, Poles : N=02~24P  
3. Stripping length : 7~8mm  
4. Operating temperature: -40°C~+105°C  
5. Undimensioned tolerances:

Pitch range in mm	Over	Over	Over	Over	Over	Over	Over
TO	6	10	30	60	100	150	0.1/10
TO	10	24	30	60	100	150	∠
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±2°

6. RoHS Compliance

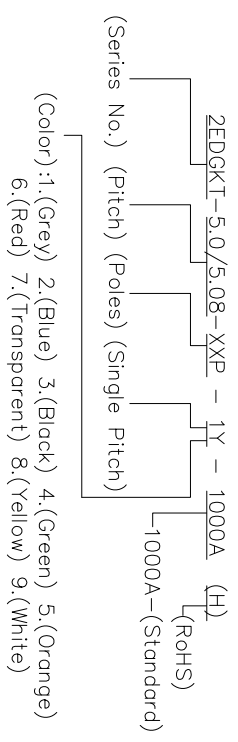

DETACHED LISTS	
PART NO.:	/
APPD:	/
CHKD:	/
DRFT:	/
THIRD ANGLE PROJECTION	
NAME:	<b>DEGSON</b> NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
TITLE:	CUSTOMER DRAWING
DRAWING NO.:	/
DO NOT SCALE DRAWING	
REV	DO
SHEET	1/1
SCALE	1:1

A B C D E F G H

8

7

6

5

4

3

2

1

A B C D E F G H