
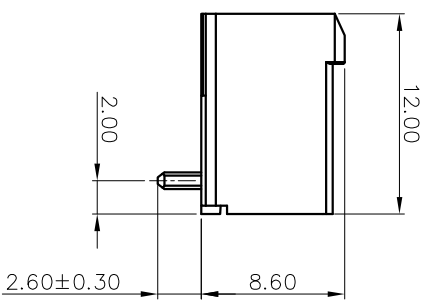
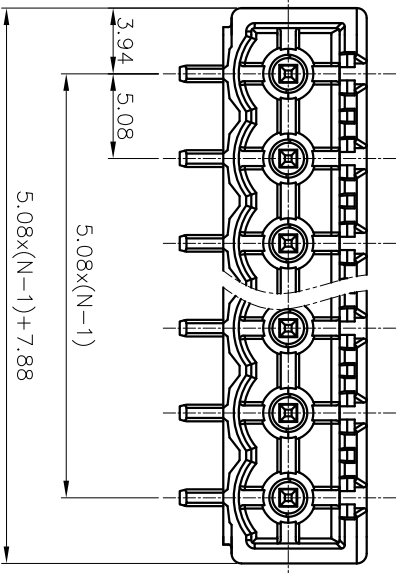


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

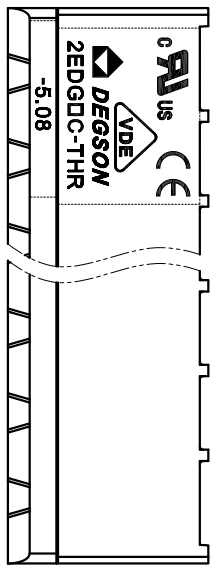


1. Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	4.0KV
Rate voltage(V)	320V
Rate current(A)	20A

NOTES2:


- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 5.08mm, Poles : N=02~12P
- 3.Operating temperature: -40°C~+130°C
- 4.Undimensioned tolerances:

Pitch Range	In		Nominal Dimension		Range		Tolerance	
	mm	in	mm	in	mm	in		
6	Over	6	Over	10	Over	30	Over	0.1/10
	TO	10	TO	30	TO	60	TO	150
10	Over	10	Over	24	Over	60	Over	150
	TO	24	TO	60	TO	100	TO	150
±0.15/±0.25/±0.20/±0.30/±0.50/±0.70/±1.00/±1.30		±0.30/±0.50/±0.70/±1.00/±1.30		±1.30		±2°		

5.RoHS Compliance

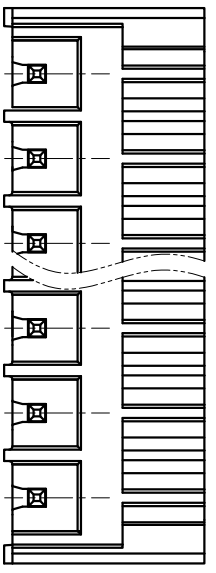

2EDGRC-THR - 5.08 - XXP - 1Y - 00A (H)  
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color)  
 00A-(Standard) (RoHS)  
 :3.(Black)  
 5.(Orange)  
 9.(White)

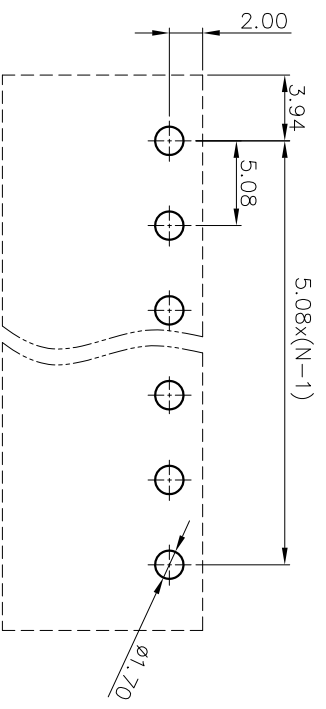

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	CHKD:	/
DRFT:	/	TITLE:	CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:	/
		DO NOT SCALE DRAWING	SCALE
			1:1

A 8 7 6 5 4 3 2 1