
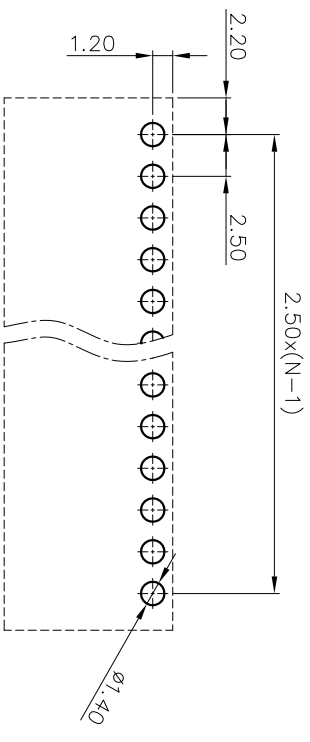

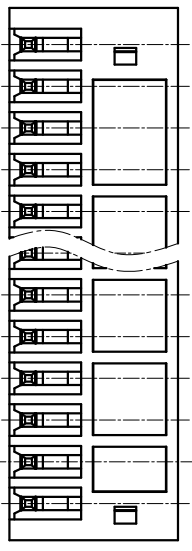

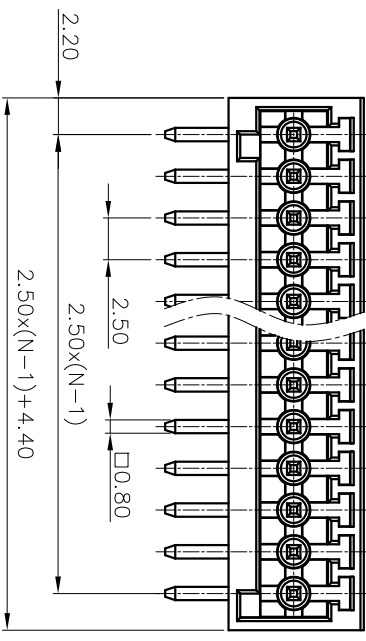


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

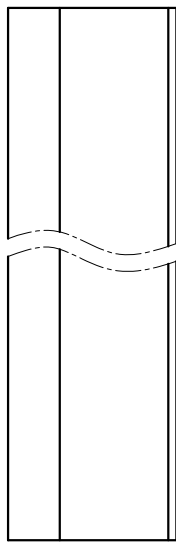

- NOTES1:
- UL Standard
 - 1.Rated voltage/current : 150V / 4A
 - 2.Withstanding voltage : AC1300V/1Min.
- IEC Standard
- Pollution degree 2
 - Overvoltage category II
 - Rate impulse voltage(KV) 2.5KV
 - Rate voltage(V) 250V
 - Rate current(A) 5A

NOTES2:

- Dimension shall be interpreted per ASME Y14.5-2009
 - Pitch : 2.50mm, Poles : N=02~12P
 - Operating temperature: -40°C~+130°C
 - Undimensioned tolerances:
- | Pitch Range | In | Nominal | Dimension | Range |
|-------------|-------|---------|-----------|-------|
| mm | Over | Over | Over | Over |
| | TO | TO | TO | TO |
| 6 | 10 | 24 | 30 | 60 |
| 10 | 10 | 30 | 60 | 100 |
| 15 | 10 | 30 | 60 | 150 |
| ±0.15 | ±0.20 | ±0.30 | ±0.50 | ±0.70 |
| | | | ±1.00 | ±1.30 |
| | | | | ±2° |
- 5.RoHS Compliance

15EDGRC-THR - 2.5 - XXP - 1Y - 00A (H)

(Series No.) (Pitch) (Poles) (Single Pitch) (Color):3.(Black) 5.(Orange) 9.(White)

(RoHS)

00A-(Standard)

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	CHKD:	/
DRFT:	/	TITLE:	CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:	/
		DO NOT SCALE DRAWING	SCALE
			1:1