
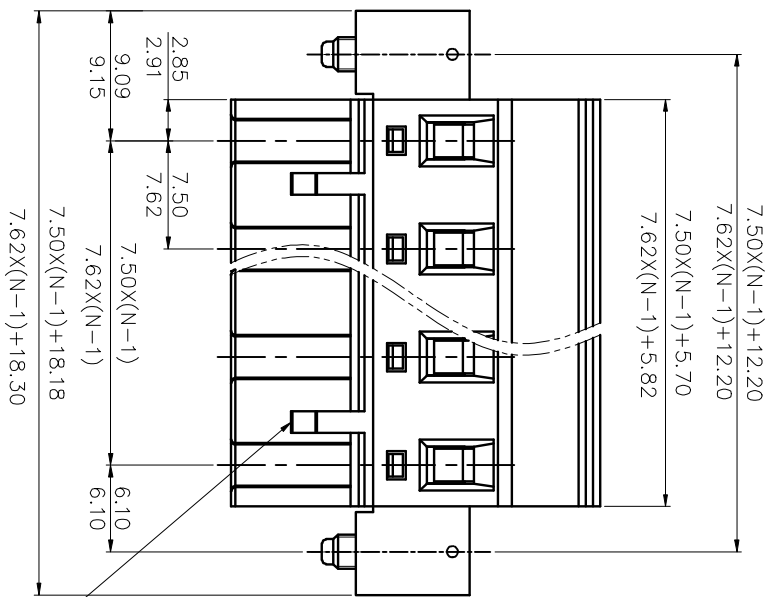
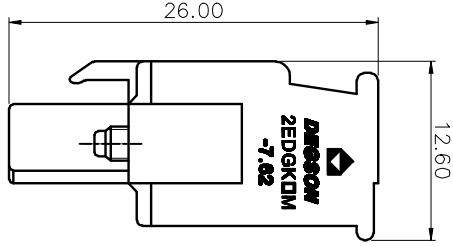
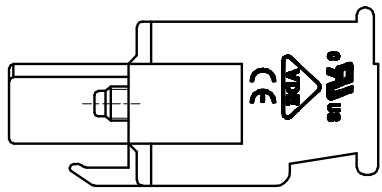


REVISION RECORD			
REV	ECN	DESCRIPTION	DATE

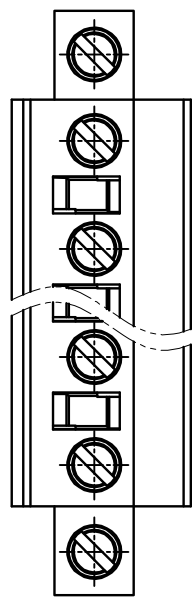

6.RoHS Compliance

Pitch range in mm	Nominal dimension range						—	—	—
	Over	Over	In	mm	Over	Over			
6	10	30	60	100	150	0.1/10			
TO	TO	TO	TO	TO	TO	<			
6	10	24	30	60	100	150			
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2	

- NOTES1:
- UL Standard
 - Rated voltage/current : 300V / 15A
 - Withstanding voltage : AC1600V/1Min.
 - Torque value : M2.5 , 3.54Lb.in
 - Wire range : 28~12AWG
- IEC Standard
- | | |
|--------------------------|-------|
| Pollution Degree | 2 |
| Overvoltage Category | III |
| Rate Impulse Voltage(KV) | 4.0KV |
| Rate Voltage(V) | 400V |
| Rate Current(A) | 18A |
 - Torque value : M2.5 , 0.4N•m
 - Wire range : 2.5mm²
- NOTES2:
- Dimension shall be interpreted per ASME Y14.5-2009
 - Pitch : 7.50/7.62mm, Poles : N=02~12P
 - Stripping length : 7~8mm
 - Operating temperature: -40°C~+105°C
 - Undimensioned tolerances:

02P: Clasp on the right from this view

ZEDGKAM - 7.5/7.62 - XXP - 1Y - 00A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch)
 (RoHS)
 00A-(Standard)

(Color) :1.(Grey) 2.(Blue) 3.(Black) 4.(Green) 5.(Orange)
 6.(Red) 7.(Transparent) 8.(Yellow) 9.(White)

DETACHED LISTS	
PART NO.:	/
APPD:	/
CHGD:	/
DRTI:	/
THIRD ANGLE PROJECTION	

DESSON 宁波德森电子有限公司 NINGBO DESSON ELECTRICAL CO.,LTD	
NAME:	ZEDGKAM-7.5/7.62-XXP-1Y-00A(H)
TITLE:	CUSTOMER DRAWING
DRAWING NO.:	/
DO NOT SCALE DRAWING	SCALE
REV	DO
SHEET	1/1
SCALE	1:1