



REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

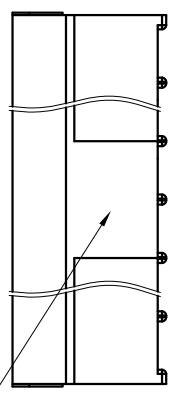

The pad is positioned centrally above the existing positions

NOTES1:

- UL Standard
- 1.Rated voltage/current : 300V / 8A
- 2.Withstanding voltage : AC1600V/1Min.

IEC Standard

1.







Pollution degree	2
Overvoltage category	II
Rate impulse voltage(KV)	2.5KV
Rate voltage(V)	250V
Rate current(A)	8A

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 3.5/3.81mm, Poles : N=02~12P/02~15P
- 3.Operating temperature: -40°C~+130°C
- 4.Undimensioned tolerances:

Pitch Range	In mm	Nominal Dimension	Range
Over	6	TO	Over
TO	10	TO	0.1/10
TO	24	TO	≤
TO	30	TO	±2°
TO	60	TO	±1.00
TO	100	TO	±1.30
TO	150	TO	±2°
TO	24	TO	±2°

5.RoHS Compliance

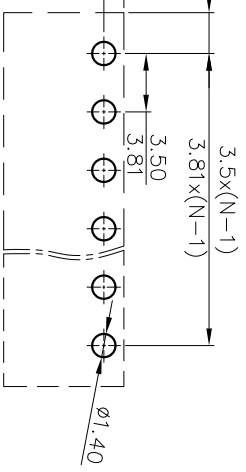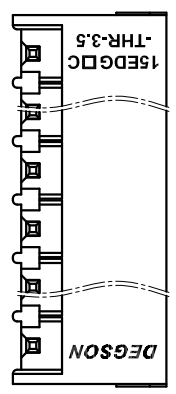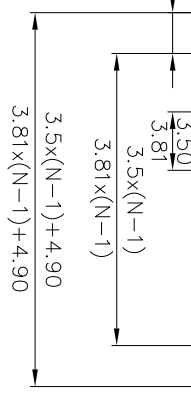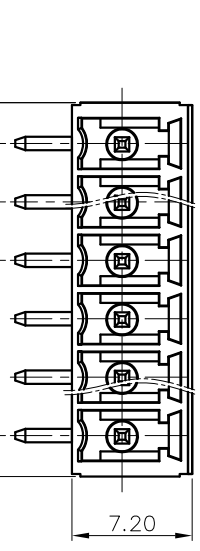

15EDGRC-THR - 3.5/3.81 - XXP - 1Y - 00A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color): 3.(Black)
 5.(Orange)
 9.(White)

DETACHED LISTS	
PART NO.:	/
APPD:	/
CHKD:	/
DRFT:	/
THIRD ANGLE PROJECTION	
NAME:	DEGSON NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
TITLE:	CUSTOMER DRAWING
DRAWING NO.:	/
DO NOT SCALE DRAWING	
REV	DO
SHEET	1/1
SCALE	1:1

A 8 7 6 5 4 3 2 1